

1. PROPRIETARY PRODUCT/MANUFACTURER

1.1. Proprietary Product: Resilient Vinyl Stair Nosings


1.2. Manufacturer:

Tarkett Phone: (800) 899-8916
 30000 Aurora Rd. (440) 543-8916
 Solon, Ohio 44139 Tech: Ext 9297
 Web: www.tarkettna.com Samples: Ext 9299
 E-mail: info@johnsonite.com


1.3. Proprietary Product Description:

1.3.1. **Construction:** Johnsonite Vinyl Stair Nosings are manufactured from a homogeneous composition of polyvinyl chloride (PVC), high quality additives, and colorants Johnsonite Vinyl Stair Nosings are designed for interior applications only and not recommended for commercial kitchen environments.


1.3.2. Styles:



SLN-XX-A: Double Undercut Carpet Vinyl Stair Nosing, 3/4" (2.0 cm) tread depth, ~1-2/5" (3.6 cm) hinged square nose configuration, undercut for 1/4" (6.35 mm) to 1/4" (6.35 mm) carpet on step and riser.

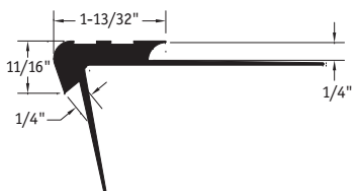

SLN-XX-B: Double Undercut Carpet Vinyl Stair Nosing, ~2/3" (1.7 cm) tread depth, ~1-2/5" (3.6 cm) hinged square nose configuration, undercut for 3/16" (4.8 mm) to 3/16" (4.8 mm) carpet on step and riser.



SLN-XX-C: Double Undercut Carpet Vinyl Stair Nosing, ~3/5" (1.4 cm) tread depth, ~1-2/5" (3.6 cm) hinged square nose configuration, undercut for 3/8" (9.5 mm) to 3/8" (9.5 mm) carpet on step and riser.

1.3.3. **Physical Characteristics:** Lengths: 12 ft. (3.66 m), Packaging: 120 ft. (39.58 m) per carton

2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- Meets ASTM F-2169 performance standards for Resilient Stair Treads, Type TV, Class 2
- **Abrasion Resistance:** ASTM D 3389, < 1.00 gram weight loss
- **Slip Resistance:** ASTM D 2047 - Exceeds Federal Standards and ADA recommendations of .6 for flat surfaces
- **Fire Resistance:** ASTM E 648/NFPA 253 (Critical Radiant Flux) - Class 1

3. INSTALLATION

3.1. See Stair Tread, Nosing, Riser, and Stringer installation instructions for complete details.

3.2. Adhesives:

- **Tarkett 946 Premium Contact Adhesive Coverage:**
 Non-porous Substrate:
 24 – 36 sq. ft. per 1 kg (0.95 quart) unit
 144 – 215 sq. ft. per 6 kg (1.44 gallon) unit
- **Tarkett 930 Two-part Epoxy Nose Caulk Coverage:**
 50 linear feet per 30 oz. cartridge
 (Based on approximately 1/4" bead size)

4. AVAILABILITY AND COST

Available through authorized Tarkett distributors nationwide.

5. WARRANTY

Limited 2 year warranty. For complete details, contact Tarkett or an authorized Tarkett distributor.

6. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures can be implemented. Refer to vinyl nosing maintenance instructions for complete details.

7. TECHNICAL SERVICES

Samples: Submittal samples for verification and approval available upon request from Tarkett. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

For current Installation and Maintenance Instructions, Product Specifications, and other technical data, visit us on the web at www.tarkettna.com or contact Tarkett at 1-800-899-8916.